

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
**WO 2004/046208 A1**

(51) International Patent Classification<sup>7</sup>: C08F 10/06,  
290/00

(21) International Application Number:  
PCT/EP2003/013035

(22) International Filing Date:  
17 November 2003 (17.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02079922.7 20 November 2002 (20.11.2002) EP

(71) Applicant (for all designated States except US): ATO-  
FINA RESEARCH [BE/BE]; Société Anonyme, Zone In-  
dustrielle C, B-7181 Seneffe (Feluy) (BE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): RAZAVI, Abbas  
[IR/BE]; 35, Domaine de la Brisée, B-7000 Mons (BE).

(74) Common Representative: ATOFINA RESEARCH  
S.A.; Patent Department, Zone Industrielle C, B-7181  
Seneffe (Feluy) (BE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: BRANCHED POLYPROPYLENE

(57) Abstract: Provided is a method for the production of a polypropylene comprising branches in the polymer backbone, which method comprises: (a) forming macromers from an olefin monomer; and (b) polymerising propylene in the presence of the macromers and a catalyst, under polymerising conditions which favour the incorporation of the macromers into the polypropylene backbone, to form a branched polypropylene; wherein the catalyst employed in step (a) comprises a metallocene catalyst which promotes a chain terminating Palkyl elimination reaction to form terminal unsaturated groups in the macromers.

WO 2004/046208 A1

## Branched polypropylene

The present invention concerns a method for producing branched polypropylenes having improved processibility and good mechanical strength. The invention is especially effective when applied to polypropylene such as miPP (metallocene-produced isotactic polypropylene). The invention also relates to branched polypropylenes produced using the methods of the invention and to polypropylene foams formed from such branched polypropylenes.

In many applications in which polyolefins are employed, it is desirable that the polyolefin used has good mechanical properties. It is known that, in general, high molecular weight polyolefins have good mechanical properties. Additionally, since the polyolefin must usually undergo some form of processing (such as moulding processes, extrusion processes and the like) to form the final product, it is also desirable that the polyolefin used has good processing properties. However, unlike the mechanical properties of the polyolefin, its processing properties tend to improve as its molecular weight decreases.

Thus, a problem exists to provide a polyolefin which simultaneously exhibits favourable mechanical properties and favourable processing properties. Attempts have been made in the past to solve this problem, by producing polyolefins having both a high molecular weight component (HMWC) and a low molecular weight component (LMWC). Such polyolefins have either a broad molecular weight distribution, or a multimodal molecular weight distribution.

There are several methods for the production of multimodal or broad molecular weight distribution polyolefins. The individual polyolefins can be melt blended, or can be formed in separate reactors in series. Use of a dual site catalyst for the production of a bimodal polyolefin resin in a single reactor is also known.

Chromium catalysts for use in polyolefin production tend to broaden the molecular weight distribution and can in some cases produce bimodal molecular

weight distribution, but usually the low molecular weight part of these resins contains a substantial amount of the co-monomer. Whilst a broadened molecular weight distribution provides acceptable processing properties, a bimodal molecular weight distribution can provide excellent properties.

Ziegler-Natta catalysts are known to be capable of producing bimodal polyethylene using two reactors in series. Typically, in a first reactor, a low molecular weight homopolymer is formed by reaction between hydrogen and ethylene in the presence of the Ziegler-Natta catalyst. It is essential that excess hydrogen be used in this process and, as a result, it is necessary to remove all the hydrogen from the first reactor before the products are passed to the second reactor. In the second reactor, a co-polymer of ethylene and hexene is formed so as to produce a high molecular weight polyethylene.

Metallocene catalysts are also known in the production of polyolefins. For example, EP-A-0619325 describes a process for preparing polyolefins having a bimodal molecular weight distribution. In this process, a catalyst system which includes two metallocenes is employed. The metallocenes used are, for example, a bis(cyclopentadienyl) zirconium dichloride and an ethylene-bis(indenyl) zirconium dichloride. By using the two different metallocene catalysts in the same reactor, a molecular weight distribution is obtained, which is at least bimodal.

A problem with known bimodal polyolefins is that if the individual polyolefin components are too different in molecular weight, they may not be as miscible with each other as is desired. The lack of miscibility tends to adversely affect both mechanical strength and processing properties.

Polypropylene resin is used in a variety of different applications. However, polypropylene resin suffers from the problem of having a low melt strength, which restricts the use of polypropylene in a number of applications because the polypropylene is difficult to process. It is known in the art to increase the melt

strength of polypropylene, for example by irradiating the polypropylene with an electron beam. It is known that electron beam irradiation significantly modifies the structure of a polypropylene molecule. The irradiation of polypropylene results in chain scission and grafting (or branching) which can occur simultaneously. Up to a certain level of irradiation dose, it is possible to produce from a linear polypropylene molecule having been produced using a Ziegler-Natta catalyst, a modified polymer molecule having free-end long branches, otherwise known as long chain branching. For example, US-A-5554668 discloses a process for irradiating polypropylene to increase the melt strength thereof. An increase in the melt strength is achieved by decreasing the melt flow rate, otherwise known as the melt index. It is disclosed that a linear propylene polymer material is irradiated with high energy ionising radiation, preferably an electron beam, at a dose rate in the range of from about 1 to  $1 \times 10^4$  Mrads per minute for a period of time sufficient for a substantial amount of chain scission of the linear, propylene polymer molecule to occur but insufficient to cause gelation of the material. Thereafter, the material is maintained for a period of time sufficient for a significant amount of long chain branches to form. Finally, the material is treated to deactivate substantially all free radicals present in the irradiated material. A disadvantage of the process disclosed in US-A-5554668 is that the production rate of the irradiated polypropylene is relatively low, This results in difficulties in commercial implementation of the process. In addition, the specification discloses the use of a very broad range of dose rates *i.e.* from 1 to  $1 \times 10^4$  Mrads per minute. High dose rates of greater than about 40 Mrad can result in a substantially fully cross-linked structure of the polypropylene. Such a cross-linked structure is difficult to process.

CA-A-2198651 discloses a continuous method for producing polypropylene mixtures of increased stress-crack resistance and melt strength in which a low-energy electron beam accelerator with an energy of from 150 to 300 keV at a radiation dose of 0.05 to 12 Mrads is employed. This process also suffers from the disadvantage that the production rate of the irradiated powder can be somewhat low for commercial acceptance. Moreover, the polypropylene powder to be irradiated must be in the form of very fine particles. The specification discloses that bifunctional, unsaturated monomers can be added before and/or during the irradiation. Such

compounds may include divinyl compounds, alkyl compounds, dienes, or mixtures thereof. These bifunctional, unsaturated monomers can be polymerised with the help of free radicals during the irradiation. Butadiene is particularly preferred.

There is thus a need for preparing polypropylene having high melt strength that does not suffer from the disadvantages of the irradiation methods.

Accordingly, the present invention provides a method for the production of a polypropylene comprising branches in the polymer backbone, which method comprises:

- (a) forming macromers from an olefin monomer; and
- (b) polymerising propylene in the presence of the macromers and a catalyst, under polymerising conditions which favour the incorporation of the macromers into the polypropylene backbone, to form a branched polypropylene;

wherein the catalyst employed in step (a) comprises a metallocene catalyst which promotes a chain terminating  $\beta$ -alkyl elimination reaction to form terminal unsaturated groups in the macromers.

The  $\beta$ -alkyl elimination reaction is described and discussed in a recent article by Moscardi and Resconi (Moscardi G. and Resconi L., in "Propene polymerisation with the isospecific, highly regioselective  $\text{rac-Me}_2\text{C}(\text{3-t-Bu-1-Ind})_2\text{ZrCl}_2/\text{MAO}$  catalyst. 2. Combined DFT/MM analysis of chain propagation and chain release reactions." In *Organometallics*, 20, 1918-1931, 2001.)

The order of steps (a) and (b) is not especially limited, provided that the macromers are incorporated into the polypropylene backbone. Thus, these steps can be carried out simultaneously or sequentially in the same reaction zone, or can be carried out in separate reaction zones, preferably in series. The method may comprise a plurality of steps for forming macromers, such as two or more macromer forming steps for forming two or more macromer types (different

macromer types may for example include macromers of different lengths, or macromers formed from different olefin monomers). The method may also comprise further steps for forming the polypropylene backbone, if desired (these further steps may for example include steps for producing a backbone having different levels of macromer incorporation, or no macromer incorporation, or may include steps for forming a propylene co-polymer using a co-monomer).


Typically, the steps (a) and (b) are carried out using two separate catalysts. In this embodiment of the present invention, it is preferred that a dual site catalyst is employed. In the context of the present invention, a dual site catalyst comprises a support having both catalysts present on individual grains of the support. Such a dual site catalyst is efficient, since it allows steps (a) and (b) to be performed simultaneously in the same reaction zone. However, in some embodiments the same catalyst may be employed in steps (a) and (b), particularly when the catalyst is of a bis-indenyl type, which is suitable for forming the backbone and the macromers. Such catalysts are also efficient, since they allow steps (a) and (b) to be performed simultaneously in the same reaction zone.


The invention is not limited to such preferred embodiments and can also be satisfactorily performed using the same or different catalysts in different reaction zones, as mentioned above. In these embodiments single site catalysts are usually employed, in which individual grains of the support are associated with only one type of catalyst.

The advantage of employing a metallocene catalyst in step (a), which promotes a chain terminating  $\beta$ -alkyl elimination reaction to form unsaturated terminal groups, is that these groups are ideal for insertion into the polymer backbone as it is forming. This allows the creation of units within the backbone having long pendant hydrocarbon chains, i.e. long chain branches. Such ease of insertion is difficult to achieve in any olefin polymerisation when the monomer has 3 carbon atoms or greater, due to steric hindrance at the metal centre preventing

re-insertion. The inventors have found that the use of a catalyst that promotes  $\beta$ -alkyl elimination, instead of the more common  $\beta$ -hydrogen elimination, overcomes this problem by removing the bulky alkyl group, as explained below in Scheme 1 and Scheme 2.

*Scheme 1:  $\beta$ -hydrogen elimination in polymerisation of propylene:*

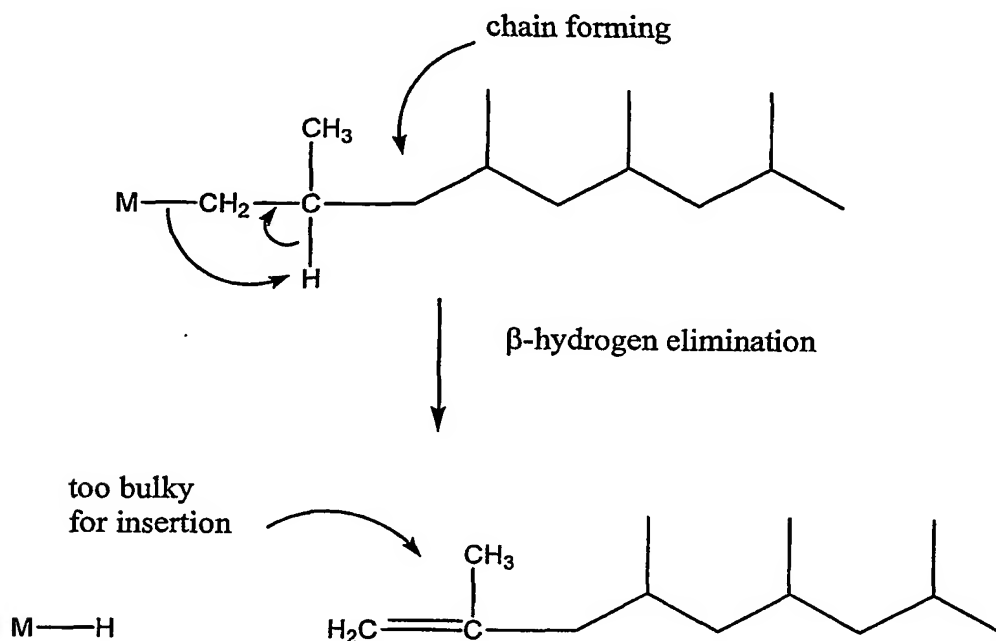


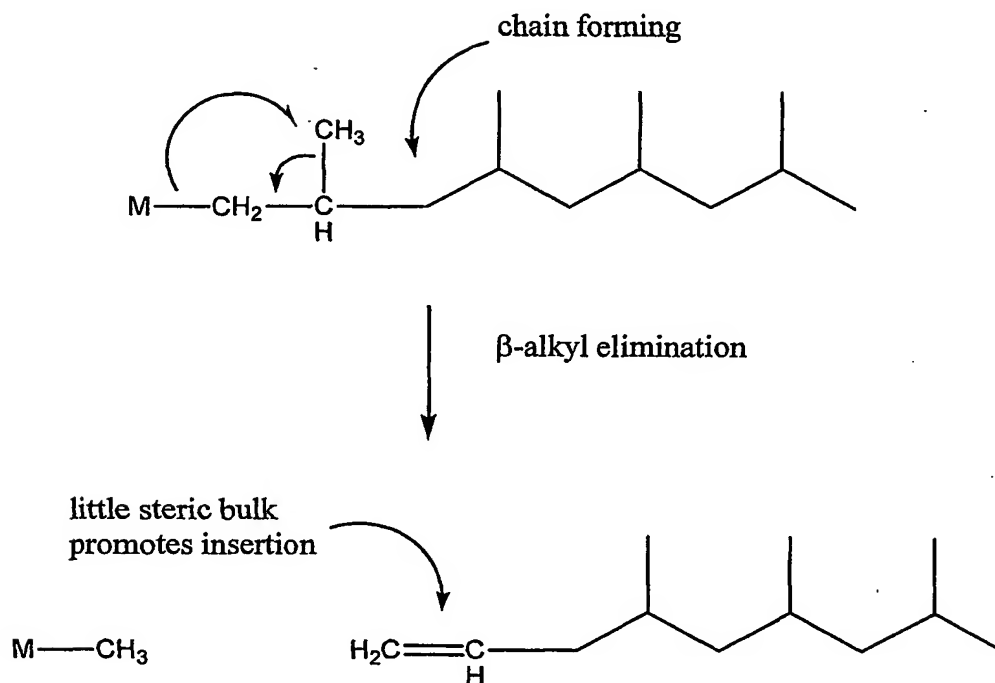Scheme 2:  $\beta$ -alkyl elimination in polymerisation of propylene:

The catalyst employed in step (a) is not especially limited, provided that it promotes  $\beta$ -alkyl elimination, as explained above. Preferably, the catalyst employed in step (a) comprises a metallocene catalyst of formula (I) or formula (II):



wherein each Ind is the same or different and is an indenyl group or a tetrahydroindenyl group; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; m is an integer from 0-6; R'' is a structural bridge imparting stereorigidity to the catalyst; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;






wherein Cp is a cyclopentadienyl ring; R'' is a structural bridge imparting stereorigidity to the catalyst; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; k is an integer from 1-4; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen

When a bisindenyl catalyst is employed in step (a), the catalyst is preferably substituted, and may comprise a symmetrical or unsymmetrical substitution pattern. In a preferred embodiment, both indenyl groups are substituted in the 3-position with identical bulky substituents that can be selected from an isopropyl group, a tertiary butyl group and a trimethylsilyl (TMS) group. Preferably it is a tertiary butyl. Preferably, the bridge is small and contains at most one carbon atom.

For the avoidance of doubt, the structure of the bisindenyl group will now be discussed. A tetrahydroindenyl ligand is depicted, but the labelling of the carbon atoms of the ligand also applies to an unsaturated indenyl ligand. The ligand used in catalysts described above is a indenyl-type ligand, in which, in the context of the present invention, the substituent positions are numbered from 1-7 according to the system set out in the structure below:



To distinguish substitution in the first ligand from the second, the second is numbered according to the same system, but from 1'-7', in accordance with convention. In this type of catalyst, the position of the bridge is not particularly limited, and is preferably a 1,1'-bridge, a 2,2'-bridge or a 1,2'-bridge, a 1,1'-bridge

being most preferred. The substitution patterns discussed above generally apply to a 1,1' bridge. Thus, the ligands are preferably substituted in the 3-positions (non-vicinal to the bridge) on the five-membered ring.

In other preferred embodiments, the Cp ring on catalyst (II) is preferably mono-substituted in positions 3, 3' with identical bulky substituents, most preferably with tertiary butyl. Preferably the bridge is small and contains at most one carbon atoms.

These two classes of catalyst components have a large aperture that enables the alkyl group to come in close contact with the metal thereby favouring the  $\beta$ -alkyl elimination reaction.

The catalysts employed in step (b) may be any catalyst capable of polymerising a polyolefin having 3 or more carbon atoms, particularly propylene. Preferably the catalyst promotes the formation of a crystalline polyolefin, i.e. an isotactic or syndiotactic polyolefin, or a polyolefin comprising isotactic and/or syndiotactic blocks. Polyolefins which are not crystalline, such as atactic polyolefins are not especially preferred.


Typically, catalysts employed in step (b) may comprise a metallocene catalyst selected from any of formulae (I)-(V):




wherein each Ind is the same or different and is an indenyl group or a tetrahydroindenyl group; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; m is an integer from 0-6; R'' is a structural bridge imparting stereorigidity to the catalyst; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;



wherein Cp is a cyclopentadienyl ring; Cp' is a fluorenyl ring; R'' is a structural bridge imparting stereorigidity to the catalyst; R<sup>1</sup> is a substituent on the cyclopentadienyl ring which is distal to the bridge, which distal substituent comprises a bulky group of the formula XR\*<sub>3</sub> in which X is an atom from group IVA and each R\* is the same or different and is chosen from a hydrogen or a hydrocarbyl group having from 1-20 carbon atoms; R<sup>2</sup> is a substituent on the cyclopentadienyl ring which is proximal to the bridge and positioned non-vicinal to the distal substituent and is of the formula YR#<sub>3</sub> in which Y is an atom from group IVA, and each R# is the same or different and is chosen from a hydrogen or a hydrocarbyl group having from 1-7 carbon atoms; the Cp ring may optionally comprise further substituents in addition to R<sup>1</sup> and R<sup>2</sup>; each R' is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms, and n is an integer of from 0-8; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;



wherein Cp is a substituted or unsubstituted cyclopentadienyl ring; Cp' is a substituted or unsubstituted fluorenyl ring; R'' is a structural bridge imparting stereorigidity to the component; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; each R' is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; m is an integer of from 0-4; r is an integer from 0-8; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;



wherein Cp is a substituted cyclopentadienyl ring; Cp' is a substituted or unsubstituted fluorenyl ring; R'' is a structural bridge imparting stereorigidity to the component; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms, each R' is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms, and x and y are independently an integer of from 0-4 and 0-8 respectively; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen; wherein the CpR<sub>x</sub> group lacks bilateral symmetry; and wherein the Cp group is preferably substituted at the 3-position;



wherein Cp is a substituted cyclopentadienyl ring or a substituted or unsubstituted fluorenyl ring; R'' is a structural bridge between Cp and X imparting stereorigidity to the component; each R is the same or different and is selected from a hydrocarbyl group having from 1-20 carbon atoms, a halogen, an alkoxy group, an alkoxyalkyl group, an alkylamino group or an alkylsilylo group; when Cp is a cyclopentadienyl ring; q is an integer from 0-4; and when Cp is a fluorenyl ring q is an integer from 0-8; X is a heteroatom from group VA or group VIA, substituted or unsubstituted; M is a metal atom from group IIIB, IVB, VB or VIB in any of its theoretical oxidation states; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen; wherein the bilateral symmetry of the CpR<sub>q</sub> group is maintained; and wherein the CpR<sub>q</sub> group is preferably symmetrically substituted.

It is particularly preferred that in step (b) catalysts having a cyclopentadienyl ligand and a fluorenyl ligand (CpFlu catalysts) are employed. This is because such catalysts have a more open structure than bisindenyl catalysts. An open structure is advantageous because there is a large angle between the cyclopentadienyl and fluorenyl groups. This allows the bulky macromers to

approach the metal centre and facilitates their incorporation into the polymer backbone.

In respect of catalysts used in both step (a) and step (b), generally M may be a metal of group IVB or vanadium, preferably Ti, Zr, or Hf. Q is not especially limited and may be a halogen and/or an alkyl group, but is preferably Cl.

R" is typically substituted or unsubstituted and comprises an alkylene radical having from 1-20 carbon atoms and preferably from 1-4 carbon atoms, a dialkyl germanium group, a dialkyl silicon group, a dialkyl siloxane group, an alkyl phosphine radical or an amine radical. More preferably, R" comprises an isopropylidene (Me<sub>2</sub>C), Ph<sub>2</sub>C, ethylenyl, Me<sub>2</sub>S or Me<sub>2</sub>Si group. In the case of catalysts employed in step (b), as mentioned above it is preferred that there is a large angle between the cyclopentadienyl, fluorenyl and indenyl groups, in order that the bulky macromers can approach the metal centre to be incorporated into the polymer backbone. Accordingly, in catalysts used in step (b) it is preferred that there is a single atom, such as a single carbon atom, bridging the ligands. Preferred bridging groups of this type include H<sub>2</sub>C, Me<sub>2</sub>C and Ph<sub>2</sub>C.

The step of forming the macromers is not especially limited. The macromers may comprise a simple olefin monomer, in which case the step (a) preferably comprises providing the olefin monomer. Alternatively, the macromers may comprise oligomers or polymers, in which case step (a) preferably comprises polymerising the olefin monomer in the presence of a macromer-forming catalyst. In this alternative, the macromer-forming catalyst is preferably selected for promoting the formation of terminal ethylenyl groups in the macromers. Without being bound by theory, it is believed that macromers comprising a terminal unsaturated group are more readily incorporated into the polypropylene backbone in step (b), since they may take the place of a propylene monomer in the polymerisation reaction.

in one embodiment of the present method, in step (a) the macromers may be formed in the presence of ethylene to promote the formation of terminal ethylenyl groups. This may help to ensure that the concentration of terminal unsaturations in the macromers is as high as possible.

In a preferred embodiment of the method of the present invention the olefin monomer for forming the macromers is propylene. The macromers may thus comprise a propylene monomer, a propylene oligomer or a polypropylene. Alternatively the macromers may be formed from another alkene, such as ethylene, butene, pentene, or hexene. It is preferred that the olefin monomer for forming the macromers comprises a terminal unsaturated group. It is also possible that the macromers are formed from two or more co-monomers.

When the olefin monomer is propylene, the steps (a) and (b) can be carried out in a single reaction zone. This is possible, since the same monomer is employed for forming the macromers and the backbone. The macromer forming step can be carried out first under macromer-forming conditions, and then the polymerisation step can be carried out subsequently under polymerisation conditions. Alternatively, the conditions can be selected such that the macromer formation and backbone formation are carried out simultaneously.

When the monomer for forming macromers is not propylene, step (a) is carried out in a first reaction zone and step (b) is carried out in a second reaction zone. In a preferred embodiment of the present method, the first reaction zone is in series with the second reaction zone. Further reaction zones may optionally be employed if desired, for example if more than one type of macromer is to be incorporated in the backbone.

Preferably the macromers employed in the present invention comprise 2 carbon atoms or more. Typically, the macromers are long chain macromers which, when incorporated in the backbone form long chain branches. In the context of the present invention, long chain means branches comprising 100 carbon atoms or

more. It is preferred that the macromers forming the branches have a molecular weight of from 2,000-50,000, more preferably from 3,000-30,000.

The level of macromer incorporation is not especially limited, provided that one or more macromers are incorporated into the polypropylene backbone. Preferably from 1-10 macromers are incorporated per 10,000 carbon atoms of the polypropylene backbone.

Polymers comprising branches of the above size and frequency have improved melt strength.

The molecular weight of the polypropylene backbone is not especially limited. Typically, the backbone has a medium molecular weight, such as of from 100,000 to 1,000,000. Preferably the molecular weight of the backbone is from 300,000 to 500,000 and most preferably is about 400,000.

The conditions under which polymerisation in step (a) or step (b) is carried out are not especially limited, provided that the formation of macromers and their incorporation in the polymer backbone is favoured. The conditions which favour the formation of branches are, for instance, conditions in which the ratio of the macromer concentration to the propylene monomer concentration is high. Typically, the polymerising step (b) is carried out as a slurry polymerisation, or as a gas phase polymerisation in which this ratio is higher than, for example, a bulk polymerisation.


In a preferred embodiment, polymerising step (b) is carried out at a temperature of 100°C or more. It is further preferred that the polymerising step (b) is carried out in the absence of hydrogen.

The catalyst system of the present invention comprises, in addition to the above catalyst component, one or more activating agents capable of activating the


metallocene catalyst. Typically, the activating agent comprises an aluminium- or boron-containing activating agent.

Suitable aluminium-containing activating agents comprise an alumoxane, an alkyl aluminium compound and/or a Lewis acid.

The alumoxanes that can be used in the present invention are well known and preferably comprise oligomeric linear and/or cyclic alkyl alumoxanes represented by the formula (A):



for oligomeric linear alumoxanes; and formula (B)




for oligomeric cyclic alumoxanes,

wherein  $n$  is 1-40, preferably 10-20;  $m$  is 3-40, preferably 3-20; and  $R$  is a  $C_1$ - $C_8$  alkyl group, preferably methyl. Generally, in the preparation of alumoxanes from, for example, aluminium trimethyl and water, a mixture of linear and cyclic compounds is obtained.


Suitable boron-containing activating agents may comprise a triphenylcarbenium boronate, such as tetrakis-pentafluorophenyl-borato-triphenylcarbenium as described in EP-A-0427696:



16

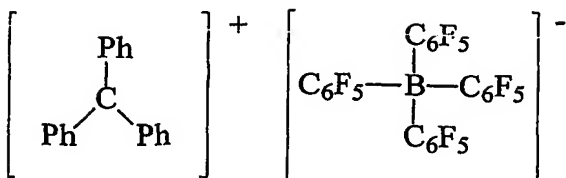

or those of the general formula below, as described in EP-A-0277004 (page 6, line 30 to page 7, line 7):

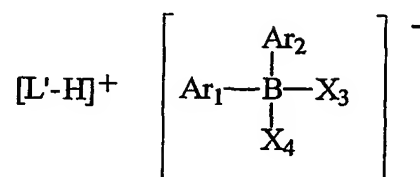

Other preferred activating agents include hydroxy isobutylaluminium and a metal aluminoxinate. These are particularly preferred when at least one Q in the general formula for metallocenes comprises an alkyl group.

The catalyst system may be employed in a solution polymerisation process, which is homogeneous, or a slurry process, which is heterogeneous. In a solution process, typical solvents include hydrocarbons having 4-7 carbon atoms such as heptane, toluene or cyclohexane. In a slurry process it is necessary to immobilise the catalyst system on an inert support, particularly a porous solid support such as talc, inorganic oxides and resinous support materials such as polyolefin. Preferably, the support material is an inorganic oxide in its finely divided form.

Suitable inorganic oxide materials which are desirably employed in accordance with this invention include group IIA, IIIA, IVA, or IVB metal oxides such as silica, alumina and mixtures thereof. Other inorganic oxides that may be employed either alone or in combination with the silica, or alumina are magnesia, titania, zirconia, and the like. Other suitable support materials, however, can be

employed, for example, finely divided functionalised polyolefins such as finely divided polyethylene.

Preferably, the support is a silica support having a surface area of from 200-700 m<sup>2</sup>/g and a pore volume of from 0.5-3 ml/g.

Both catalysts can be on the same or different supports.

The amount of alumoxane and metallocenes usefully employed in the preparation of the solid support catalyst can vary over a wide range. Preferably the aluminium to transition metal mole ratio is in the range between 1:1 and 100:1, preferably in the range 5:1 and 50:1.

The order of addition of the catalyst and alumoxane to the support material can vary. In accordance with a preferred embodiment of the present invention alumoxane dissolved in a suitable inert hydrocarbon solvent is added to the support material slurried in the same or other suitable hydrocarbon liquid and thereafter the catalyst component is added to the slurry.

Preferred solvents include mineral oils and the various hydrocarbons which are liquid at reaction temperature and which do not react with the individual ingredients. Illustrative examples of the useful solvents include the alkanes such as pentane, iso-pentane, hexane, heptane, octane and nonane; cycloalkanes such as cyclopentane and cyclohexane, and aromatics such as benzene, toluene, ethylbenzene and diethylbenzene.

Preferably the support material is slurried in toluene and the catalyst component and alumoxane are dissolved in toluene prior to addition to the support material.

The present invention also provides a branched polypropylene obtainable according to a method as defined above. The branched polypropylenes of the

present invention are particularly useful in forming polypropylene foams, which can be used to replace polystyrene foams. The present invention therefore also provides polypropylene foams, formed from a branched polypropylene of the present invention.

The branched polypropylene of the present invention has a very high melt strength that makes it suitable for various applications such as for example thermoforming applications, extrusion blow moulding, blown films or extrusion coating.

## CLAIMS:

1. A method for the production of a polypropylene comprising branches in the polymer backbone, which method comprises:

- (a) forming macromers from an olefin monomer; and
- (b) polymerising propylene in the presence of the macromers and a catalyst, under polymerising conditions which favour the incorporation of the macromers into the polypropylene backbone, to form a branched polypropylene;

wherein the catalyst employed in step (a) comprises a metallocene catalyst which promotes a chain terminating  $\beta$ -alkyl elimination reaction to form terminal unsaturated groups in the macromers and is selected from



wherein both Ind are the same and an indenyl group or a tetrahydroindenyl group; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; m is an integer from 0-6; R'' is a structural bridge imparting stereorigidity to the catalyst and containing at most one carbon atom; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;  
or from




wherein Cp is a cyclopentadienyl ring; R'' is a structural bridge imparting stereorigidity to the catalyst and containing at most one carbon atom; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms, k is an integer of from 1-4; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen.

2. The method according to claim 1, wherein the bisindenyl catalyst (I) employed in step (a) comprises a symmetrical substitution pattern and both indenyl or tetrahydroindenyl groups are mono-substituted in position 3.
3. The method according to claim 2, wherein the substituent on each indenyl or tetrahydroindenyl group is a bulky substituent.
4. The method according to claim 1, wherein the di-cyclopentadienyl catalyst (II) employed in step (a) comprises a symmetrical substitution pattern and both cyclopentadienyl groups are mono-substituted in position 3.
5. The method according to claim 4, wherein the substituent on each cyclopentadienyl group is a bulky substituent.
6. The method according to any one of claims 2 to 5, wherein the bulky substituent is selected from an isopropyl group, a tertiary butyl group and a trimethylsilyl (TMS) group.
7. The method according to any preceding claim, wherein the catalyst employed in step (b) comprises a metallocene catalyst selected from any of formulae (I)-(V):




wherein each Ind is the same or different and is an indenyl group or a tetrahydroindenyl group; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; m is an integer from 0-6; R'' is a structural bridge imparting stereorigidity to the catalyst; M is a metal atom from group IVB


or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;



wherein Cp is a cyclopentadienyl ring; Cp' is a fluorenyl ring; R'' is a structural bridge imparting stereorigidity to the catalyst; R<sup>1</sup> is a substituent on the cyclopentadienyl ring which is distal to the bridge, which distal substituent comprises a bulky group of the formula XR\*<sub>3</sub> in which X is an atom from group IVA and each R\* is the same or different and is chosen from a hydrogen or a hydrocarbyl group having from 1-20 carbon atoms; R<sup>2</sup> is a substituent on the cyclopentadienyl ring which is proximal to the bridge and positioned non-vicinal to the distal substituent and is of the formula YR#<sub>3</sub> in which Y is an atom from group IVA, and each R# is the same or different and is chosen from a hydrogen or a hydrocarbyl group having from 1-7 carbon atoms; the Cp ring may optionally comprise further substituents in addition to R<sup>1</sup> and R<sup>2</sup>; each R' is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms, and n is an integer of from 0-8; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;



wherein Cp is a substituted or unsubstituted cyclopentadienyl ring; Cp' is a substituted or unsubstituted fluorenyl ring; R'' is a structural bridge imparting stereorigidity to the component; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; each R' is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms; m is an integer of from 0-4; r is an integer from 0-8; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen;



wherein Cp is a substituted cyclopentadienyl ring; Cp' is a substituted or unsubstituted fluorenyl ring; R'' is a structural bridge imparting stereorigidity to the component; each R is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms, each R' is the same or different and is a hydrocarbyl group having from 1-20 carbon atoms, and x and y are independently an integer of from 0-4 and 0-8 respectively; M is a metal atom from group IVB or is vanadium; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen; wherein the CpR<sub>x</sub> group lacks bilateral symmetry; and wherein the Cp group is preferably substituted at the 3-position;



wherein Cp is a substituted cyclopentadienyl ring or a substituted or unsubstituted fluorenyl ring; R'' is a structural bridge between Cp and X imparting stereorigidity to the component; each R is the same or different and is selected from a hydrocarbyl group having from 1-20 carbon atoms, a halogen, an alkoxy group, an alkoxyalkyl group, an alkylamino group or an alkylsilylo group; when Cp is a cyclopentadienyl ring; q is an integer from 0-4; and when Cp is a fluorenyl ring q is an integer from 0-8; X is a heteroatom from group VA or group VIA, substituted or unsubstituted; M is a metal atom from group IIIB, IVB, VB or VIB in any of its theoretical oxidation states; and each Q is a hydrocarbon having from 1-20 carbon atoms or is a halogen; wherein the bilateral symmetry of the CpR<sub>q</sub> group is maintained; and wherein the CpR<sub>q</sub> group is preferably symmetrically substituted.

8. The Method according to any of claims 1 to 7, wherein M is Ti, Zr, or Hf.
9. The method according to any of claims 1 to 8, wherein Q is Cl.

10. The method according to any of claims 1 to 9, wherein R" is a (Me<sub>2</sub>C), H<sub>2</sub>C, or a Ph<sub>2</sub>C group.
11. The method according to any preceding claim, wherein in step (a) the macromers are formed in the presence of ethylene to promote the formation of terminal ethylenyl groups in the macromers.
12. The method according to any preceding claim, wherein the olefin monomer for forming the macromers comprises propylene.
13. The method according to claim 12, wherein the steps (a) and (b) are carried out in the same reaction zone and wherein the two catalysts are supported on the same support or on different supports.
14. The method according to claim 12 or claim 13, wherein the macromer forming step (a) is carried out under macromer-forming conditions and the polymerisation step (b) is carried out under polymerisation conditions.
15. The method according to any of claims 1-11, wherein the olefin monomer for forming the macromers comprises an olefin other than propylene.
16. The method according to claim 15, wherein the olefin monomer for forming the macromers comprises ethylene, butene, pentene and/or hexene.



17. The method according to claim 15 or claim 16, wherein the steps (a) and (b) are carried out in separate reaction zones.
18. The method according to any preceding claim, wherein the macromers comprise an olefin monomer, an olefin oligomer or a polyolefin.
19. The method according to claim 18, wherein step (a) is carried out in a first reaction zone and step (b) is carried out in a second reaction zone in series with the first reaction zone.
20. The method according to any preceding claim, wherein step (b) is carried out at a temperature of 100°C or more.
21. The method according to any preceding claim, wherein step (b) is carried out in the absence of hydrogen.
22. A branched polypropylene obtainable according to a method as defined in any preceding claim.
23. The branched polypropylene according to claim 22, which comprises a branched isotactic polypropylene.
24. A polypropylene foam, prepared from a branched polypropylene as defined in claim 22 or claim 23.
25. A blown film prepared from a branched polypropylene as defined in claim 22 or claim 23.

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 03/13035

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C08F10/06 C08F290/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99/29742 A (EXXON CHEMICAL PATENTS INC) 17 June 1999 (1999-06-17) page 3, line 14 - page 22, line 17; claims; examples	1-23
X	WO 98/34971 A (EXXON CHEMICAL PATENTS INC) 13 August 1998 (1998-08-13) page 4, line 1 - page 21, line 29; claims; examples	1-25
X	WO 94/07930 A (EXXON CHEMICAL PATENTS INC) 14 April 1994 (1994-04-14) page 5, line 27 - page 40, line 22; claims	1-25
X	EP 0 987 279 A (IDEMITSU PETROCHEMICAL CO) 22 March 2000 (2000-03-22) claims; examples 5-8	1-19, 22, 23
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

17 March 2004

Date of mailing of the international search report

26/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kaumann, E

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 03/13035

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 209 173 A (IDEMITSU PETROCHEMICAL CO) 29 May 2002 (2002-05-29) page 20, line 6 - page 23, line 43; examples I-1, I-2, I-5, I-6, I-7 page 31, line 7 - page 41, line 37; claims -----	1-19, 22, 23
X	US 5 554 668 A (SCHEVE B JOSEPH ET AL) 10 September 1996 (1996-09-10) cited in the application column 8, line 31 - line 58; claims -----	22-25
A	EP 1 195 391 A (ATOFINA RES) 10 April 2002 (2002-04-10) page 3, line 31 - line 39 page 5, line 65 - page 6, line 11; claims -----	1-25
A	WO 00/37514 A (EXXON CHEMICAL PATENTS INC) 29 June 2000 (2000-06-29) page 18, line 5 - page 19, line 18; claims; examples -----	1-25
A	WO 99/02540 A (BOREALIS AS ;REPO TIMO (FI); LESKELAE MARKKU (FI)) 21 January 1999 (1999-01-21) page 14, line 7 - page 15, line 14; claims -----	1-25

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/13035

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
WO 9929742	A	17-06-1999	BR	9813031 A		15-08-2000
			CA	2306352 A1		17-06-1999
			CN	1106408 B		23-04-2003
			DE	69818705 D1		06-11-2003
			EP	1361232 A2		12-11-2003
			EP	1044225 A1		18-10-2000
			JP	2001525460 T		11-12-2001
			US	6197910 B1		06-03-2001
			WO	9929742 A1		17-06-1999
			US	6342574 B1		29-01-2002
WO 9834971	A	13-08-1998	BR	9806952 A		21-03-2000
			BR	9807468 A		02-05-2000
			BR	9807672 A		15-02-2000
			BR	9807827 A		08-03-2000
			BR	9808578 A		30-05-2000
			CA	2274062 A1		13-08-1998
			CA	2276214 A1		13-08-1998
			CA	2277063 A1		13-08-1998
			CA	2277111 A1		13-08-1998
			CA	2279851 A1		13-08-1998
			CN	1246127 T		01-03-2000
			CN	1113915 B		09-07-2003
			CN	1130406 B		10-12-2003
			CN	1128840 B		26-11-2003
			DE	69808243 D1		31-10-2002
			DE	69808243 T2		08-05-2003
			DE	69809192 D1		12-12-2002
			DE	69809192 T2		24-07-2003
			DE	69816037 D1		07-08-2003
			EP	0958323 A1		24-11-1999
			EP	0958309 A1		24-11-1999
			EP	0958313 A1		24-11-1999
			EP	0958314 A1		24-11-1999
			EP	0958324 A1		24-11-1999
			ES	2181173 T3		16-02-2003
			ES	2187005 T3		16-05-2003
			JP	2001511212 T		07-08-2001
			JP	2002513433 T		08-05-2002
			JP	2001511214 T		07-08-2001
			JP	2001527589 T		25-12-2001
			JP	2001511215 T		07-08-2001
			US	6114457 A		05-09-2000
			US	6147180 A		14-11-2000
			US	6660809 B1		09-12-2003
			WO	9834985 A1		13-08-1998
			WO	9834986 A1		13-08-1998
			WO	9834965 A1		13-08-1998
			WO	9834970 A1		13-08-1998
			WO	9834971 A1		13-08-1998
			US	2003078350 A1		24-04-2003
			US	6444773 B1		03-09-2002
			US	2002077434 A1		20-06-2002
WO 9407930	A	14-04-1994	AU	4928993 A		26-04-1994
			CA	2145635 A1		14-04-1994
			EP	0662980 A1		19-07-1995
			JP	8502303 T		12-03-1996

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/13035

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9407930	A	WO 9407930 A1	14-04-1994
EP 0987279	A	22-03-2000	
		JP 10338717 A	22-12-1998
		JP 10338704 A	22-12-1998
		JP 11199641 A	27-07-1999
		JP 11292944 A	26-10-1999
		EP 0987279 A1	22-03-2000
		US 6573352 B1	03-06-2003
		CN 1117104 B	06-08-2003
		WO 9855520 A1	10-12-1998
		TW 513442 B	11-12-2002
		US 2003208024 A1	06-11-2003
EP 1209173	A	29-05-2002	
		EP 1209173 A1	29-05-2002
		CN 1364174 T	14-08-2002
		WO 0107493 A1	01-02-2001
US 5554668	A	10-09-1996	
		US 4916198 A	10-04-1990
		US 5591785 A	07-01-1997
		US 5731362 A	24-03-1998
		AT 88196 T	15-04-1993
		CA 1280543 C	19-02-1991
		CN 1041769 A , B	02-05-1990
		DE 3688258 D1	19-05-1993
		DE 3688258 T2	29-07-1993
		EP 0190889 A2	13-08-1986
		IN 170549 A1	11-04-1992
		NO 167039 B	17-06-1991
		PT 81945 A , B	01-02-1986
		AU 616106 B2	17-10-1991
		AU 5215890 A	19-07-1990
		AU 597241 B2	31-05-1990
		AU 5284386 A	07-08-1986
		AU 7942891 A	12-09-1991
		BR 8600413 A	14-10-1986
		CN 86100791 A , B	04-02-1987
		IN 166935 A1	11-08-1990
		JP 7045551 B	17-05-1995
		JP 62121704 A	03-06-1987
		NO 860330 A	01-08-1986
		RU 2031906 C1	27-03-1995
		ZA 8600528 A	24-09-1986
EP 1195391	A	10-04-2002	
		EP 1195391 A1	10-04-2002
		AU 2358902 A	15-04-2002
		CN 1468265 T	14-01-2004
		WO 0228923 A1	11-04-2002
		EP 1322682 A1	02-07-2003
WO 0037514	A	29-06-2000	
		BR 9916426 A	04-09-2001
		CA 2356667 A1	29-06-2000
		CN 1361795 T	31-07-2002
		EP 1141051 A1	10-10-2001
		JP 2002533485 T	08-10-2002
		WO 0037514 A1	29-06-2000
		US 2003060583 A1	27-03-2003
		US 6573350 B1	03-06-2003

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/13035

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9902540	A	21-01-1999	FI 972946 A	12-01-1999
			AU 8341498 A	08-02-1999
			EP 0994885 A1	26-04-2000
			WO 9902540 A1	21-01-1999
			JP 2001509511 T	24-07-2001
			US 6362356 B1	26-03-2002